

Volex 400G OSFP Active Copper Cable



Volex's OSFP 400G active copper cable features 8 transmitting and 8 receiving channels. The cable assembly supports 200Gbps with 25Gbps/lane NRZ modulation and 400Gbps with 50Gbps/lane PAM-4 modulation. The cable assembly meets OSFP MSA and IEEE 802.3cd specifications. The signal integrity severely stressed under high-speed data transmission is enhanced via advanced linear equalization. The result is longer reach up to 7M vs 3M for the passive version with the same unique dielectric material and cable construction that offers the smallest cable size and highest flexibility.

As next-gen data centers deploy faster speed in a tighter space, they need high performance cables that reduce power consumption, provide reliable operation and are low cost. Volex's OSFP active Direct Attach Cable is designed to meet the next-gen data center needs and is a cost effective alternative to the high power consumption Active Optical Cable.



Low power consumption and heat dissipation



Complete cable assembly uniquely terminated at the factory to provide the most reliable operation



100% tested for signal integrity with serial number traceability

FEATURES AND SPECIFICATIONS


Product Type	400G OSFP active copper cable
Conductor Treatment	Laser stripped conductors
Cable Type	High speed twinax cable, 16-pair differential, 100 +/-5 ohms
Cable Colour	Black
Cable Jacket	Plastic braided mesh
Packaging	Anti-Static PE bag
Power Supply Voltage	3.3V
Power Consumption	<150mW per active channel
Temperature Range	0 - 70oC
Retention Force	Minimum 125N per MSA specification
Insertion Force	Maximum 40N per MSA specification
EEPROM	Each connector module contains an EEPROM to provide product information to the host system
Cable Termination	100% factory tested including comprehensive signal integrity verification and serial number traceability using advanced Manufacturing Execution Systems

Volex reserves the right to change specifications and availability without prior notice.

High-Speed Interconnect

Applications	Standards Compliance
<ul style="list-style-type: none"> Switches, Servers, Routers, Storage Arrays Networking Equipment Data Centres Telecommunication Central Offices Test and Measurement Equipment 	<ul style="list-style-type: none"> IEEE 802.3cd Specification for OSFP, Rev 5.0 EIA-364 CMIS 5.0 UL 94, 1581, VW1, File No. E510564 RoHS

Mechanical Drawing

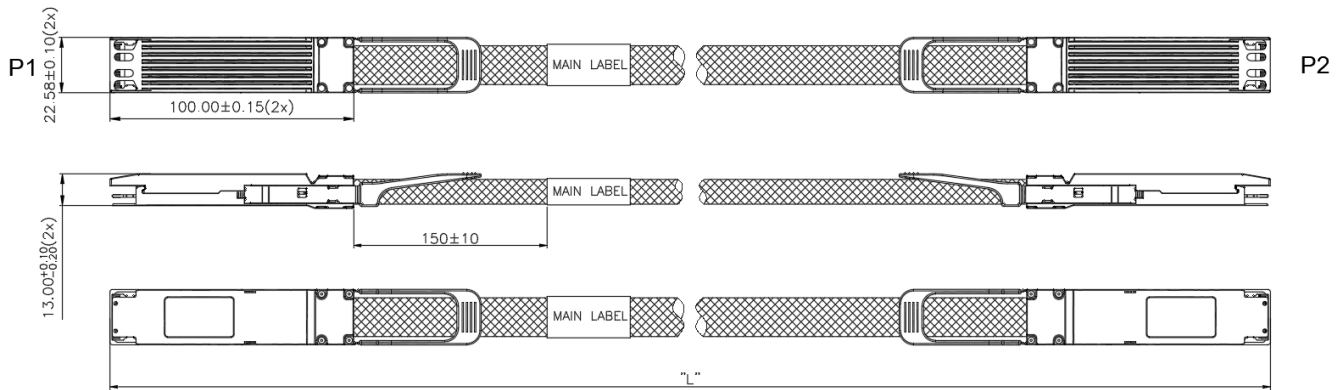

Volex P/N	Cable Length (m)	Cable Gauge (AWG)	Cable OD (mm)
DE50BDG30BA	3.00	30AWG	9.0
DE50BDG40BA	4.00	30AWG	9.0
DE58BDG50BA	5.00	28AWG	10.4
DE58BDG60BA*	6.00	28AWG	10.4
DE58BDG70BA*	7.00	28AWG	10.4
DE56BDG70BA*	7.00	26AWG	11.6

* Cables are pending final qualification. Length listed above are preliminary.

3.0 – 7.0m lengths available with 30AWG-26AWG conductor sizes to achieve maximum performance.

Options Available

- Custom colours for cable jacket
- Custom colours for pull tab
- Custom EEPROM mapping

Volex Worldwide CONTACT INFO		
Americas Tel: +1 512 608 2402	EMEA Tel: +44 7768 924844	
China Tel: +86 159 5019 6906	Asia Pacific Tel: +65 6904 1545	India Tel: +91 99406 10637

Contact us at sales@volex.com
for assistance in finding the right solution for your needs.