

Volex OSFP 400G Passive DAC Cable



Volex's OSFP 400G passive direct attach copper cable features 8 transmitting and 8 receiving channels. The cable assembly supports 200Gbps with 25Gbps/lane NRZ modulation and 400Gbps with 50Gbps/lane PAM-4 modulation for a reach up to 3m.

As next-gen data centers deploy faster speed in a tighter space, they need high performance cables that reduce power consumption, provide reliable operation and are low cost. Volex's OSFP 400G cable is designed to meet the next-gen data center needs. With unique foam dielectric construction, Volex OSFP 400G cable offers Smallest cable outer diameter and bend radius and highest flexibility while meeting or exceeding the MSA signal integrity specification.



Near zero power consumption and no heat generated



Complete cable assembly uniquely terminated at the factory to provide the most reliable operation



100% tested for signal integrity with serial number traceability

FEATURES AND SPECIFICATIONS


Product Type	OSFP 400G passive direct attach cable
Conductor Treatment	Laser stripped conductors
Cable Type	High speed twinax cable, 16-pair differential, 100 +/-5 ohms
Cable Colour	Black
Cable Jacket	Plastic braided mesh
Packaging	PE bag
Power Supply Voltage	3.3V
Power Consumption	0
Temperature Range	0 - 70°C
Retention Force	Minimum 125N per MSA specification
Insertion Force	Maximum 40N per MSA specification
EEPROM	Each connector module contains an EEPROM to provide product information to the host system
Cable Termination	100% factory tested including comprehensive signal integrity verification and serial number traceability using advanced Manufacturing Execution Systems

Volex reserves the right to change specifications and availability without prior notice.

High-Speed Interconnect

Applications	Standards Compliance
<ul style="list-style-type: none"> Switches, Servers, Routers, Storage Arrays Networking Equipment Data Centres Telecommunication Central Offices Test and Measurement Equipment 	<ul style="list-style-type: none"> IEEE 802.3cd, InfiniBand HDR Specification for OSFP, Rev 5.0 EIA-364 UL 94, 1581, VW1, File No. E510564 RoHS CMIS 5.0

Mechanical Drawing

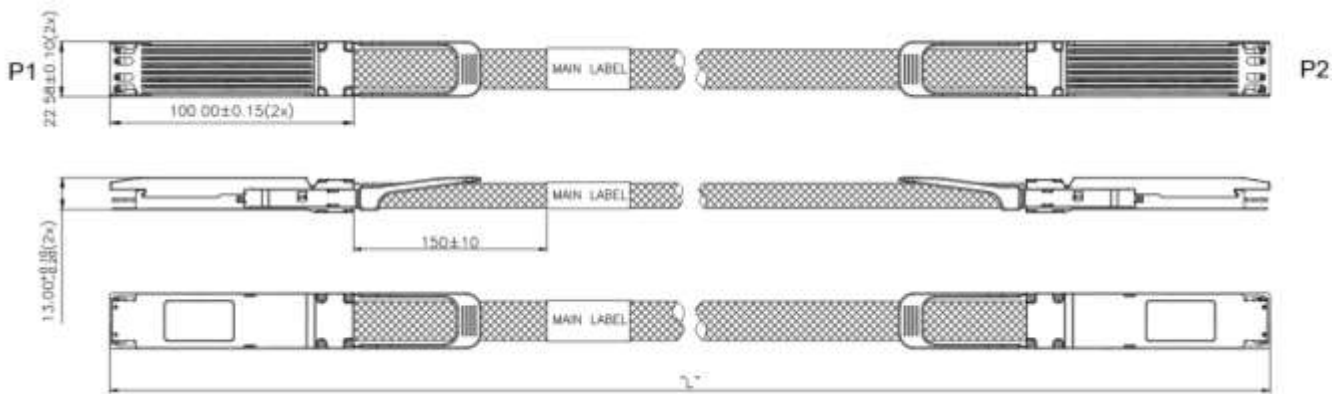

Volet P/N	Cable Length (m)	Cable Gauge (AWG)	Cable OD (mm)
DE50BDG05BS	0.50	30AWG	9.0
DE50BDG10BS	1.00	30AWG	9.0
DE50BDG15BS	1.50	30AWG	9.0
DE50BDG20BS*	2.00	30AWG	9.0
DE58BDG25BS*	2.50	28AWG	10.4
DE56BDG30BS*	3.00	26AWG	11.6

* - Maximum cable reach of passive DAC will be shorter in InfiniBand HDR application.

0.5 – 3.0m lengths available with 30AWG-26AWG conductor sizes to achieve maximum performance.

Options Available

Custom colours for cable jacket
 Custom colours for pull tab
 Custom EEPROM mapping

Volex Worldwide CONTACT INFO		
Americas Tel: +1 512 608 2402		EMEA Tel: +44 7768 924844
China Tel: +86 159 5019 6906	Asia Pacific Tel: +65 6904 1545	India Tel: +91 99406 10637

Contact us at sales@volex.com
 for assistance in finding the right solution for your needs.