

# NACS INLET

## 1000V

Charging Inlet for direct current (DC) and alternating current (AC) charging, compatible with NACS vehicle charging connectors (EVSE), for installation in electric vehicles for electromobility (EV).



### PRODUCT DEFINITION

<b>Product Type</b>	Vehicle Charging Inlet
<b>Application</b>	For Charging with Alternating Current (AC) and Direct Current (DC)
	For Installation in Electric Vehicles (EV)
	Combined Charging System
<b>Standards / Regulations</b>	UL 2251
<b>Charging Standard</b>	NACS TS-0023666, IEC 62196-1
<b>Charging Mode</b>	Mode 2, 3, 4
<b>Protective Cap</b>	A Protective Cap is Supplied as Standard for the DC and AC Contacts.
<b>Connection Method</b>	Screws Connection (cannot be disconnected)

### AMBIENT CONDITIONS

<b>Ambient Temperature (Operation)</b>	-40°C to +60°C
<b>Ambient Temperature (Storage / Transport)</b>	-40°C to +85°C
<b>Maximum Altitude</b>	4000 m (above sea level)
<b>Degree of Protection</b>	With the inlet mounted to a representative body panel and the connector mated to the inlet, the system shall withstand an IP44 test as described in IEC 60529.
	When mounted to a representative vehicle body panel and unmated to the connector, the inlet shall withstand an IP67 water and dust test as described in IEC 60529.
	When mounted to a representative vehicle body panel and unmated to the connector, the inlet shall withstand an IP6K9K water test as described in IEC 60529.

### POWER CONTACTS

<b>Number</b>	3 (HV+, HV-, PE)
<b>Rated Voltage</b>	The North American Charging Standard exists in 1000V rated configuration. The 1000V version is mechanically backwards compatible.
<b>Rated Current</b>	The North American Charging Standard shall specify no maximum current rating. The maximum current rating of the inlet or connector shall be determined by the manufacturer, provided that the temperature limits defined in section 8 are maintained. Tesla has successfully operated the North American Charging Standard above 900A continuously with a non-liquid cooled vehicle inlet.


### ELECTRICAL PROPERTIES

<b>Number of Phases</b>	1
<b>Charging Power (Nominal Operation)</b>	TBD
<b>Type of Charging Current</b>	DC, AC 1-phase
<b>Insulation Resistance</b>	> 200 MΩ
<b>Coding</b>	2.7 kΩ (between PE and PP)

### DIMENSIONS

<b>Height</b>	84 mm
<b>Width</b>	68 mm
<b>Depth</b>	95 mm
<b>Bore Dimensions</b>	52 mm X 68 mm

## NACS INLET MECHANICAL DRAWING

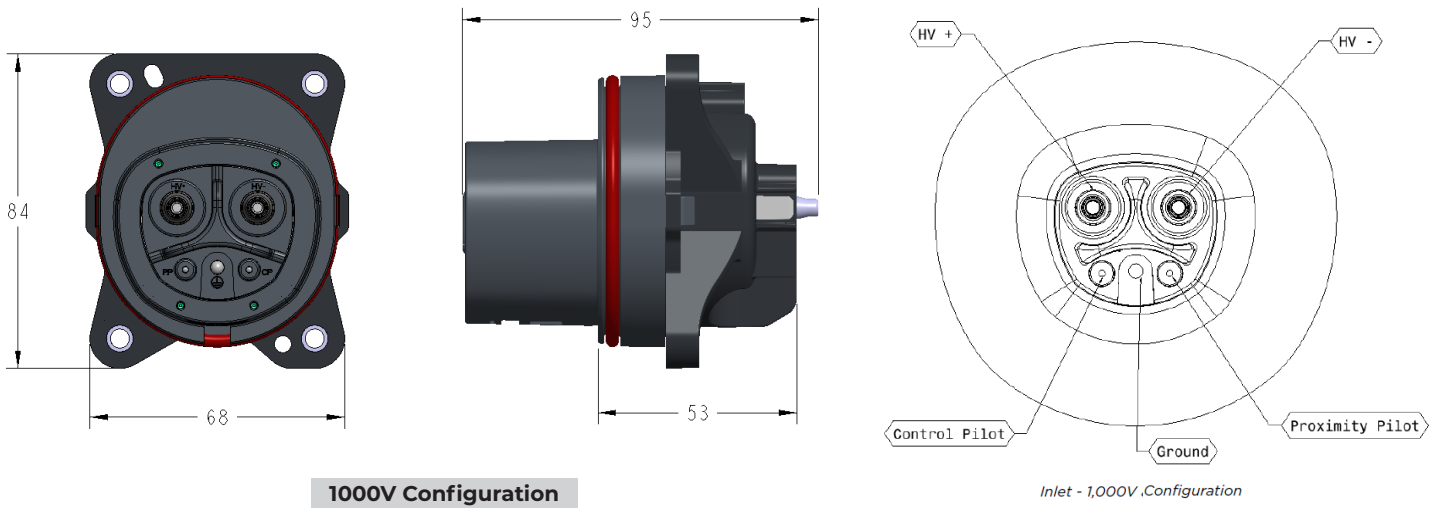

SIGNAL CONTACTS		TEMPERATURE SENSORS			
<b>Number</b>	2 (PP, CP)	<b>Sensor Type</b>	NTC Thermistor		
<b>Rated Current for Signal Contacts</b>	2A	<b>Nominal Resistance and Tolerance</b>	R25 100 KΩ ± 5.0%		
<b>Rated Voltage for Signal Contacts</b>	30V AC	<b>B Value and Tolerance</b>	B25 / 85 4, 150K ± 3.0%		
<b>Note on the Connection Method</b>	Crimp Connection (cannot be disconnected)	<b>Maximum Rated Power</b>	P25 200mW		
<b>Material Contacts</b>	Cu-Alloy	<b>Permissive Operating Current</b>	I25 0.14mA		
<b>LV Connectors</b>	Connectors: DELPHI 15438866, APTIV 13678638	<b>Temperature</b>	-40°C to +125°C		
MECHANICAL PROPERTIES		DESIGN		MATERIAL	
<b>Insertion / Withdrawal Cycles</b>	> 10,000	<b>Design Line</b>	Generation 1	<b>Material</b>	Plastic
<b>Insertion Force</b>	< 90 N	<b>Housing Colour</b>	Black	<b>Flammability Rating</b>	V0
<b>Withdrawal Force</b>	< 90 N	<b>Customer Variations</b>	On Request	<b>Material Surface of Contacts</b>	Ag
MOUNTING					
<b>Restrictions to Mounting Position</b>	0° to 90° Frontal Inclination Possible				
<b>Mounting Position of the Locking Actuator</b>	5 mm (Ø)				
<b>Mounting Hole Diameter</b>	5 m				
<b>Required Mounting Screws</b>	M4				
<b>Screws Included in the Scope of Delivery</b>	None				
ENVIRONMENTAL PRODUCT COMPLIANCE					
<b>REACH SVHC</b>	Compliant				
<b>China RoHS</b>	Compliant				
<b>EU RoHS</b>	Compliant				

Contact us at [sales@volex.com](mailto:sales@volex.com)  
for assistance in finding the right solution for your needs.